

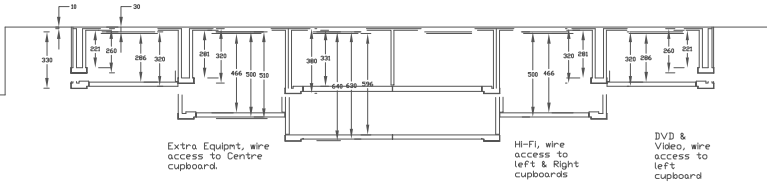


22mm MDF adjustable shelves.
 To go onto polished floor. Fit double skirting as/IF required.
 Existing skirting cut/removed to install our works
 Curtains adjusted to suit our design, works by others after our installation.
 We provide upstand for cornice by customer's builders to suit our design after our installation.
 New Finished Floor to ceiling height taken as 2830mm with cornice by builders after our installation taken as 140mm verticle (or as otherwise specified by builders and agreed by us at the time of ordering. Alteration will entail additional charges. Soffit run from sides of bookcase to return walls to take cornice as there will not be enough room to return cornice between bookcase and corner wall return. One adjustable shelf provided in each side cupboard.
 Cut for wire/power etc on site if/as required & directed but only insofar as is provided in our estimate.
 Cut out back for ventilation and wires.



Power cable, TV, BT, Intruder Alarm display lighting etc and all electrical works and equipment etc to be supplied and fitted by others prior to/after our installation.
 TV in central lower cupboard as indicated, vent potboard, wire access to side cupboards and through back, cut for power etc. on site for provision of sockets etc by customer's own electrical contractors.
 Handles for customer's own supply and fix after our installation unless sent to our premises prior to delivery/collection when we will fix.
 Terms and Conditions and those in Estimate Specifications apply
 TV-Hi 615mm - V-970mm - D-590mm
 Sky-H-70mm - W-370mm - D-N/A

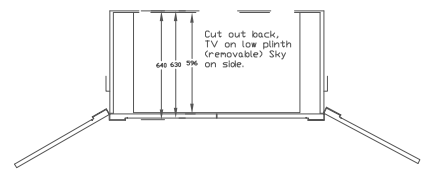

Extra Equipmt, wire access to Centre cupboard.
 Hi-Fi, wire access to left & Right cupboards
 DVD & Video, wire access to left cupboard
 Cut out back for Power; speakers; TV and cables. Wire access through sides to Hi-Fi & DVD/Video to right and Esp. to left. Hang doors on carcass sides; False pilasters; Sky poised on side next to TV in Cupboard.