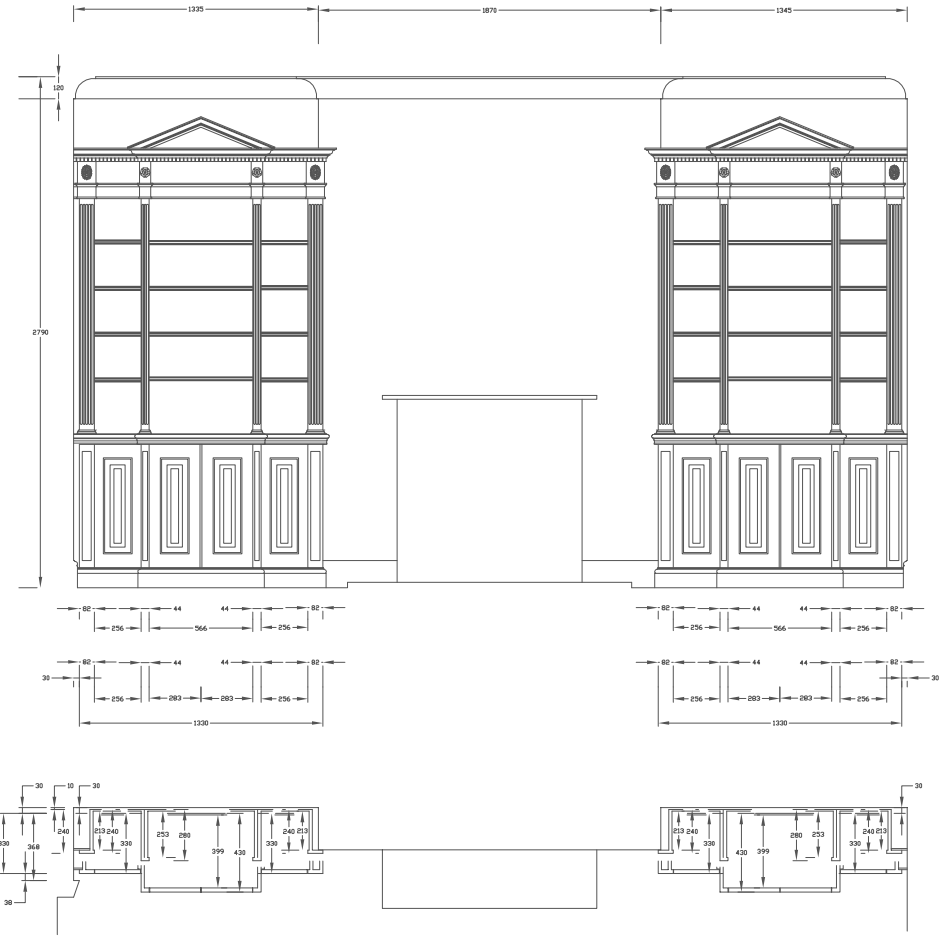

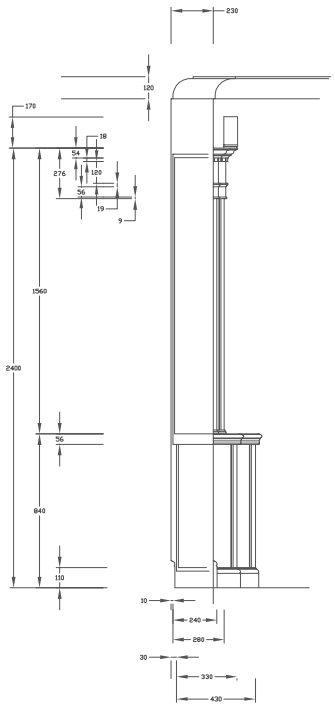

22/mm MDF adjustable shelves

To go onto polished floor. Fit double skirting as/if required.

Existing skirting cut/removed to install our works

Curtains and existing pelmet board adjusted to suit our design, works by others after our installation.

Existing works removed & made good by others prior to our installation.

One adjustable shelf provided in each cupboard.

Cut for wire/power etc on site if/as required & directed but only insofar as is provided in our estimate.

Cut out back for venilation and wires.

Power cable, TV, BT, Intruder Alarm etc and all electical works etc to be removed/resited as required; works by others prior to/after our installation.

Cut additional holes in waist-top for wires if/as required on site.

Lights, power and all equipment supplied and fitted by others after our delivery.

Hi-Fi in cupboard if specified and agreed on ordering. Vent potboard, wire access to side cupboards if/as required and through back, cut for power etc. on site.

Handles for customer's own supply and fix after our installation unless sent to our premises prior to delivery/collection when we will fix.

Terms and Conditions and those in Estimate Specifications apply